PERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 17 June 2004 (17.06.2004)

PCT

(10) International Publication Number WO 2004/052034 A1

- (51) International Patent Classification7: H04Q 7/22, 7/32
- (21) International Application Number:

PCT/SE2003/001856

(22) International Filing Date:

28 November 2003 (28.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 0203603-6

3 December 2002 (03.12.2002) SE

- (71) Applicant (for all designated States except US): SMART-TRUST AB [SE/SE]; Box 471 54, S-100 74 Stockholm
- (71) Applicants (for US only): MANNER, Anja, Sisko (heiress of the deceased inventor) [FI/FI]; Urkupillintie 7 G 68, FIN-00420 Helsinki (FI). MANNER, Paavo, Juhani (heiress of the deceased inventor) [FI/FI]; Urkupillintie 7 G 68, FIN-00420 Helsinki (FI).
- (72) Inventor: MANNER, Juha-Pekka (deceased).


- (74) Agent: SÖDERMAN, Päivi; SmartTrust Systems Oy, P.O. Box 119, FIN-00511 Helsinki (FI).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM FOR FILE MANAGEMENT IN A MOBILE NETWORK

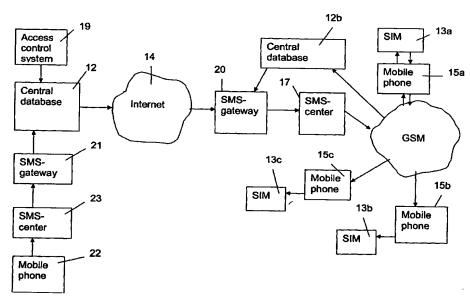

(57) Abstract: The invention is concerned with a system for file management in a mobile network. The network comprises one or more mobile terminals having a memory with saved file information and a central database containing information to be updated. The system comprises means for requesting a change in the files of the mobile terminal(s), and means for updating new information in the files of the mobile terminal(s). In the method of the invention a request for a change to be made in the files of the mobile terminal is sent to the central database, which updates its information on the basis of said request. The new information is then sent from the central database to the files of defined mobile terminals.



METHOD AND SYSTEM FOR FILE MANAGEMENT IN A MOBILE NETWORK

TECHNICAL FIELD

5

15

20

25

The invention is concerned with a method and system for file management in a mobile network, especially for updating SIM files.

10 BACKGROUND ART

The Global System for Mobile Communication (GSM) is a standard for digital wireless communications. GSM has much more services than just voice telephony. Additional services allow nowadays a great flexibility in where and when GSM phones are used. Today's second-generation GSM networks deliver high quality and secure mobile voice and data services (such as SMS/Text Messaging) with full roaming capabilities across the world.

The development of GSM Networks and terminals to support more advanced data bearer technologies has allowed for the introduction of new exciting data services. These technologies allow for a greater bandwidth and more capable execution environment, so permitting for the development of mobile applications. The world has become increasingly computer centric and computer applications are now used for a number of tasks such as communications, financial management, information retrieval, entertainment and game playing. It is a natural progression for the user to expect these applications to be available to them on their mobile terminal.

More information about GSM services can be found on http://www.gsmworld.com/technology/applications/.

10

15

In mobile networks people can be contacted by calling to their mobile telephone number or by sending to that number a so called short message by e.g. making use of the Short Message Service (SMS). The point-to-point Short message service (SMS) provides a means of sending messages of limited size to and from GSM mobiles. Detailed information can be found in the ETSI standard GSM 03.40 Version 5.3.0.

The Subscriber Identity Module (SIM) inside GSM phones is a smart chip that was originally designed as a secure way to connect individual subscribers to the network. There is an on-going evolution of the SIM into a standardized and secure application platform for GSM and next generation networks.

ETSI (the European Telecommunications Standards Institute) is a not-for-profit organization whose mission is to produce the telecommunications standards for use throughout Europe and beyond. The ETSI TS 100 977 V8.2.0 (2000-05) standard describes the interface between the SIM and the Mobile Equipment (ME) within the digital cellular telecommunications system.

The logical structure of files in SIM is hierarchical and there are three types of files, i.e. Elementary Files (EF), Dedicated Files (DF) and Master Files (MF), the last mentioned ones being highest in the hierarchy.

20 EF_{ADN} is an elementary file containing Abbreviated Dialling Numbers (ADN) and/or Supplementary Service Control Strings (SSC). In addition, it contains identifiers of associated network/bearer capabilities and identifiers of extension records. It may also contain an associated alpha-tagging.

The EF_{ADN} file is colloquially called the "phone book" file since the mobile phone user use it for fetching the right telephone number by name when trying to contact someone by calling or sending an SMS.

20

25

There are often difficulties in the communication as contact cannot be established due to unavailable or wrong contact information, absent people or the contact is tried to establish at a totally wrong occasion.

SyncML, described in http://www.syncml.org/technology.html is one attempt to try to solve this problem. It defines databases for synchronizing central database information with information on users' devices and vice versa. The SyncML solution, however, requires mobile terminals that support the SyncML protocol, which is a disadvantage, since most mobile stations do not have this support yet.

10 THE OBJECT OF THE INVENTION

The object of this invention is a system and a method with which the above problems are solved by using existing networks for presenting up-to-date contact information.

15 SUMMARY OF THE INVENTION

The system of the invention for file management in a mobile network, comprising One or more mobile terminals having a memory with saved file information and a central database containing information to be updated, is mainly characterized in that the system comprises means for requesting a change in the files of the mobile terminal(s), and means for updating new information in the files of the mobile terminal(s).

In the method of the invention a request for a change to be made in the files of the mobile terminal is sent to the central database, which updates its information on the basis of said request. The new information is then sent from the central database to the files of defined mobile terminals.

10

15

20

The central database has information about to which mobile terminals the new information shall be sent.

The file information in the invention consists of contact information, which is used as a phone book, but in addition to the ordinary phone book information in the EF_{ADN} file, the contact information in the invention further comprises additional information such as e.g. information about if a given person is busy, in a meeting, in or out of the office, free to call to, at home etc. It could even include the e-mail address, the fax number or other such additional information. The information and technical implementation could vary according to application and the purpose in which the invention is used.

For company use, the implementation could be to connect the company's physical access control system to the contact information in the mobile phone. Many companies have an access control system, which is used to register when people are coming in and going out. The access control system can in the invention be connected to the file information on SIM (the "phonebook") having an interface working as said means for requesting a change in the phonebook in real time in order to update phonebook data. In the central database, there is an internal database containing phonebooks of SIMs, which are thus updated whenever certain data in the central database phonebook changes. Information about whether a person is in the office or not could then be available in the phone book of the mobile terminal of selected persons at any time. Similarly, calendar or location information could be integrated with the phonebook.

25

Said interface for the updating data on SIMs is in practice to the GSM network. This interface, which is an SMS gateway, can also be provided by the operator. In such a configuration, the SMS gateway can support central phonebooks of e.g. many companies.

A further implementation possibility is to make it possible for users to update their whereabouts by means of a service on their mobile terminal, e.g. for not being contacted during a concert or an important customer meeting. With a mobile service, the users could also inform the time when they are available or any other information they would like to tell the calling party. Such a service would be useful not only for companies but also for other subscribers. Children for example, could have a service on their mobile phone, with which they can inform their whereabouts to their parents. The mobile terminal can thus work as a notice board at home.

10

15

20

25

30

5

The advanced phonebook services provided by the invention can make the way people communicate more efficient. Before contacting anyone people can check the preferred communication method, and whether the person is present or not. Users will see the latest contact information whenever trying to contact someone with the mobile phone. Codes can be used instead of text for making the contact information easily readable on a mobile phone, e.g. the code "+" could be used for a person, who is present, and the code "-" for a person who is absent.

Phonebooks on the SIMs can in this way contain the newest information. Whenever a user selects a person to be contacted he/she will see not only the name and phone number but also additional contact information.

The invention can easily be implemented in existing mobile terminals and e.g. GSM standards without the need for special protocols. Thus, it can be used in all GSM phones. In the invention, the technical limitations of existing mobile phones, as well as of the communication channels have been taken into consideration making commercial application instantly feasible.

A possible problem with the invention might be a very heavy traffic flow to a given mobile phone, if SIM file updates take place often. In some embodiments of the invention, it is, therefore possible to restrict the number of updates by e.g.

restricting them to given persons only, or given time periods, such as for the time of a very busy project, or to interrupt the service during vacations, travels, weekends etc.

In the following, the invention will be described by means of some exemplified embodiments to the details of which the invention is not restricted.

FIGURES

10

- Figure 1 is a presentation of the standardized Elementary File (EF) in the Subscriber Identity Module (SIM) containing Abbreviated Dialling Numbers (ADN) and/or Supplementary Service Control strings (SSC)
- Figure 2 is an example of an embodiment of the invention implemented in the standardized EF_{ADN} of figure 1
 - Figure 3 is an architecture view of a network in which the invention can be implemented

20

- Figure 4 is a signaling diagram of a first embodiment of the method of the invention
- Figure 5 is a signaling diagram of a second embodiment of the method of the invention

DETAILED DESCRIPTION

Figure 1 is a presentation of a standardized Elementary File (EF) in the Subscriber Identity Module (SIM) for a GSM session.

10

15

20

25

The ETSI TS 100 977 V8.2.0 (2000-05) standard defines the requirements for the physical characteristics of the SIM, the electrical signals and the transmission protocols, the model for the logical structure of SIM, the security features, the interface functions, the commands, the application protocol and the contents of the files required for the GSM applications.

The logical structure of files in SIM is hierarchical and there are three types of files, i.e. Elementary Files (EF), Dedicated Files (DF) and Master Files (MF), the last mentioned ones being highest in the hierarchy. The files are administrative or application specific. They contain a header part and, with respect to the elementary files, also a body part containing data. A file ID used to identify each file consists of two bytes and shall be coded in hexadecimal notation. The type of the file is identified by the first byte, and for example "6F" means that it is an elementary file under the 1st level Dedicated File.

The Elementary Files (EF) for the GSM session defining access conditions, data items and coding. A data item is a part of an EF, which represents a complete logical entity, e.g. the alpha tag in an EF_{ADN} record. EFs are mandatory (M) or optional (O). The file size of an optional EF may be zero. All EFs with with a file size greater than zero shall contain all mandatory items.

EF_{ADN} is an elementary file containing Abbreviated Dialling Numbers (ADN) and/or Supplementary Service Control strings (SSC). In addition it contains identifiers of associated network/bearer capabilities and identifiers of extension records. It may also contain an associated alpha-tagging.

The EF_{ADN} file is colloquially called the "phone book" file since the mobile phone user use it for fetching the right telephone number by name when trying to contact someone by calling or sending an SMS.

With respect to Elementary Files, three different structures are used, namely EFs with a transparent structure, linear fixed EFs and cyclic EFs.

10

15

20

25

An EF with a linear fixed structure consists of a sequence of records all having the same (fixed) length. The length of a record, as well as this value multiplied by the number of records, are indicated in the header field of the EF. The maximum length of an EF_{ADN} file is according to the field represented in figure 1 by reference number 4, X + 14 bytes, each byte consisting of 8 bits.

Figure 1 also defines the access conditions, data items and coding of an EF_{ADN}. A data item is a part of an EF, which represents a complete logical entity. In figure 1, the data items of the Elementary File, EF_{ADN}, are described by means of a field presentation. Thus field 1 is the identifier of a given SIM file, i.e. describes what SIM file it is question about, which in figure 1 is the EF_{ADN} file coded as 6F3A and shown by reference number 1 in figure 1.

The field represented by reference number 2 shows that the file is a linear fixed EF file. According to the field represented by reference number 3, the EF_{ADN} file is optional and the length of it may thus be zero. All EFs with a file size greater than zero shall contain all mandatory data items.

The field represented by reference number 5 indicates that the file can be updated.

Every file has its own specific access condition for each command. There are different access condition levels, such as Always (=The action can be performed without any restriction), Card Holder Verification 1 (CHV1) and Card Holder Verification 2 (CHV2) (=The action is possible if a correct CHV1/CHV2 value already has been presented to SIM during the current session, the CHV1/CHV2 enabled/disabled indicator is set to "disabled" or unblock CHV1/CHV2 has been successfully performed during the current session), ADM (=Allocation of these levels and the respective requirements for their fulfillment are the responsibility of the appropriate administrative authority) and Never (=The action cannot be performed over the SIM/ME interface, but the SIM may perform the action internally).

WO 2004/052034



Different functions may act on the files on a SIM. It is mandatory for all SIM cards in accordance with standard ETSI TS 100 977 V8.2.0 (2000-05) to support the functions Select, Status, Read Binary, Update Binary, Read Record, Update Record, Seek, Increase, Invalidate and Rehabilitate.

- As appears in figure 1, field 6, the functions Read (Record), Update (Record), Invalidate and Rehabilitate can be performed on the EF_{ADN} file, the functions having the access conditions CHV1, CHV1, CHV2 and CHV2, respectively. For example the Read Record function can only be performed if the READ access condition for this EF is satisfied and so on with respect to the other functions.
- Each record consists of a row of data items represented by fields 7a 7f, the maximum length of each data item being indicated in column 8, the sum of which is X + 14 bytes. Column 9 indicates whether the field is optional or mandatory, column 10 describes the data item information included in each row and column 11 defines the order of each data item in one row.
- Thus, each row contains as its first item an alpha identifier (indicated in field 7a in figure 1) according to column 10, such as a name associated with a given Abbreviated Dialling Number (ADN) indicated in field 7d. Field 7d can also contain a Supplementary Service Control string (SSC) consisting of e.g. a character string for an abbreviated transfer call code. Column 8 indicates the length of field 7a to be X bytes, column 9 that this data item is optional. Column 11 tells that this data item is the first item in a row represented by the X first bytes. The value of X maybe from zero to 241 and depends on the settings in the individual mobile terminals.
- The second data item described in field 7b informs the coding method, i.e. length of the BCD (Binary Coded Decimal) number and possible SSC content. Field 7c describes the type of number (TON) and numbering plan identification (NPI). Field 7d presents the dialling number associated with the alpha identifier in field 7a or a possible transfer code for transferring the call to another number. Field 7e

15

20



presents the capability/configuration identifier containing associated capability/configuration parameters required for the call, and field 7f is an extension 1 record identifier containing an associated called party subaddress or additional data.

According to column 9, all data items 7b - 7f except the alpha identifier 7a are mandatory. In the invention it has found out that the alpha identifier field 7a gives the possibility to add additional information in it.

Figure 2 shows an example of an embodiment of the SIM card of the invention, wherein additional information has been included in the alpha identifier field 7a of the $\mathsf{EF}_{\mathsf{ADN}}$ file. The content of the fields represented by reference numbers 1 -6 and 7b - 7f remain intact in the invention compared to the standard $\mathsf{EF}_{\mathsf{ADN}}$ file.

Field 7a indicates that this is John Smith's telephone number, and minus (-) indicates that he is not available for the time being and will be so until the time and date indicated, here 5 o'clock, 12^{th} December, 2002. Of course other information can be informed and other ways to code than the minus (-) for absent in the example above.

Figure 3 is an architecture view of a network in which the invention can be implemented. When in the invention data in a central data base 12 phone book is updated, the updated information is forwarded to pre-selected SIM phone books 13a, 13b and 13c and updated there, too. Information about to which mobile terminals the updated information shall be forwarded to is in the central database 12. In the updating, standardized SIM toolkit commands for Remote File Management can be used (ETSI TS 101 181 V 8.3.0 (2000-08)).

25 The central data base 12 containing phone book data can be e.g. a company's internal data base which is integrated with the phone book of the mobile phones of the persons working in the company. The central data base can in the

10

15

20

25




invention also be the operator's data base 12b containing the phone book data of all subscribers or defined groups of subscribers.

The message from the central database 12 to the SIMs 13a, 13b and 13c are forwarded through a public network, such as Internet 14 with the TCP/IP protocol used in internet. So that the message could be forwarded to the SIMs 13a, 13b and 13c of the mobile phones 15a, 15b and 15c respectively via the GSM network 16 it goes via an SMS-center 17, wherein the message is converted to an SMS message using the SS7 protocol. The SMS gateway 20 is technically an optional component but in practice it is used by many operators for administrative purposes for e.g. charging, routing and access control purposes.

The requests to the central database 12 for updating phone book information can come from e.g. a company's physical access control system 19 or via an SMS gateway 21 and SMS-center 23 from an employee's mobile phone 22. The SMS gateway 21 converts the message from the mobile phone 22 into the TCP/IP protocol so that it can be received by the central database 12.

The requests to the central database 12b can come directly from any mobile phone (from 15a in figure 3) in the GSM network but are updated by the central database 12b, which has the access information about who is entitled to send such messages and which has the information about to which mobile phones 15a, 15b and 15c and further to the SIMs 13a, 13b and 13c the updating information shall be sent. The signals performing the updating are explained in connection with figures 4 and 5.

Figure 4 presents an example of a method embodiment of the invention, in which a company's access control system is connected to the contact information to be updated in a mobile phone.



The updating is initiated by a request signal 1 from the access control system to a central database. The request signal is in this example assumed to be from a person with the name John Smith in accordance with figure 2. The information that John Smith wish to update is that he will be absent until 2 o'clock 12th December, 2002. The message can be written e.g. in the form "- 2.00, 12.12.2002". In the central database, there is an internal database containing phonebooks of SIMs, which are thus updated whenever certain data in the central database phonebook changes. Therefore, after receiving the request, the central phone book updates its data in step 2.

To update this information also in the SIMs, the central phone book sends updating information including information about to which mobile phones the information should be sent to via the internet (by using the TCP/IP protocol) to the SMS gateway in signal 3. The SMS gateway is not technically necessary, but important in practice, since it also handles e.g. charging and other administrative tasks. The update information then proceeds to the SMS center in signal 4, where it is converted to an SMS message using the SS7 standard format for sending it to selected mobile phones (only one illustrated in figure 4) through the GSM network in signal 5. The mobile phone sends the update information to its SIM card in signal 6 and the SIM phone book is updated in step 7 in a way presented in figure 2.

Figure 5 presents an example of a method embodiment of the invention, in which SIM phonebook files are updated from a mobile phone. In this embodiment, a request to update SIM phonebook information is sent in signal 1 from a mobile phone with an SMS message to a local SMS-center handling all SMS messages in that area in the GSM network. The SMS-C converts the message and sends it in signal 2 with the TCP/IP protocol to the SMS-gateway usually handled by the operator and taking care of charging and other administrative tasks. The SMS gateway then sends the request in signal 3 to a central SIM phonebook to be updated there at first. Thereafter the process exceeds as in figure 4.



WO 2004/052034

 System for file management in a mobile network, comprising one or more mobile terminals having a memory with saved file information and a central database containing information to be updated in the files of said one or more mobile phones,

13

characterized in that

the central database has information about to which mobile phones the updated information shall be sent and that the system further comprises

- a physical access control system connected to the information to be updated in the mobile phones and for requesting a change in the files of the mobile terminal(s), and
 - means for updating the new information in the files of the mobile terminal(s) informed in the central database .

15

5

- 2. System of claim 1, c h a r a c t e r i z e d in that the mobile network is the Global System of Mobile Communication (GSM).
- System of claim 1, c h a r a c t e r i z e d in that central database contains
 Subscriber Identity module (SIM) phonebooks of subscribers in the GSM network.
 - 4. System of claim 1, c h a r a c t e r i z e d in that the information to be updated consists of contact information such as telephone numbers, location and time information, fax numbers, e-mail addresses, calendar information and/or other information.
 - 5. System of claim 1, c h a r a c t e r i z e d in that the memory is a Subscriber Identity Module (SIM) with a standard EF_{ADN} file containing field information.

25

15



6. System of claim 6, c h a r a c t e r i z e d in that the EF_{ADN} file in the SIM contains additional contact information, such as location and time information, fax numbers, e-mail addresses and/or other information besides the alfa identifier information of telephone numbers.

7. System of claim 7, c h a r a c t e r i z e d in that the additional information is embedded in the alpha identifier field of the EF_{ADN} file.

- 8. System of claim 7 or 8, c h a r a c t e r i z e d in that the contact information is coded to a shorter form to make it suitable to be embedded.
 - System of any of claims 1 9, c h a r a c t e r i z e d in that it further comprises a SMS gateway performing charging and other administrative tasks.
 - 10. Method for file management in a mobile network, comprising one or more mobile terminals having a memory with saved file information and a central database containing information to be updated in the files of said one or more mobile phones,
- a physical access control system connected to the information to be updated in the mobile phones,
 - characterized in that the method comprises the following steps
 - a) sending from the physical access control system to the central database a request for a change to be made in the files of the mobile terminal(s),
- b) the central database updating its information on the basis of said request,c) sending from the central database the new information to the files of the pre-determined mobile terminal(s) defined in the central database.
- 11. Method of claim 10, c h a r a c t e r i z e d in that a request for a change to be made in the files of selected mobile terminal(s) is sent from a mobile phone.

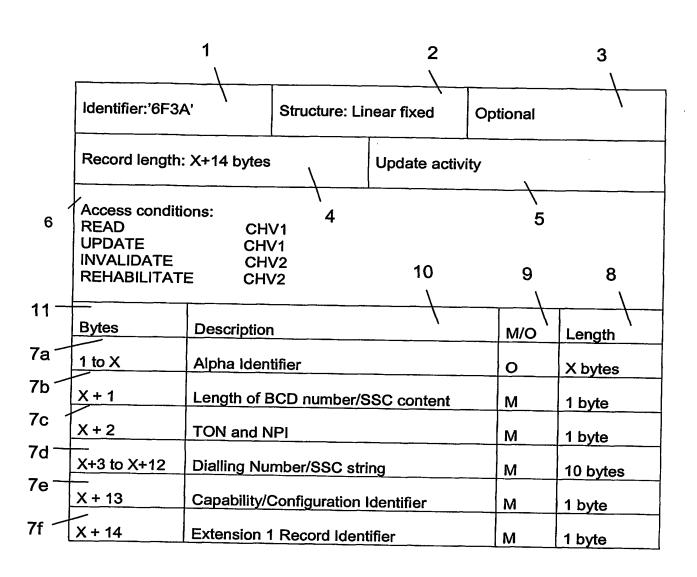


FIG. 1

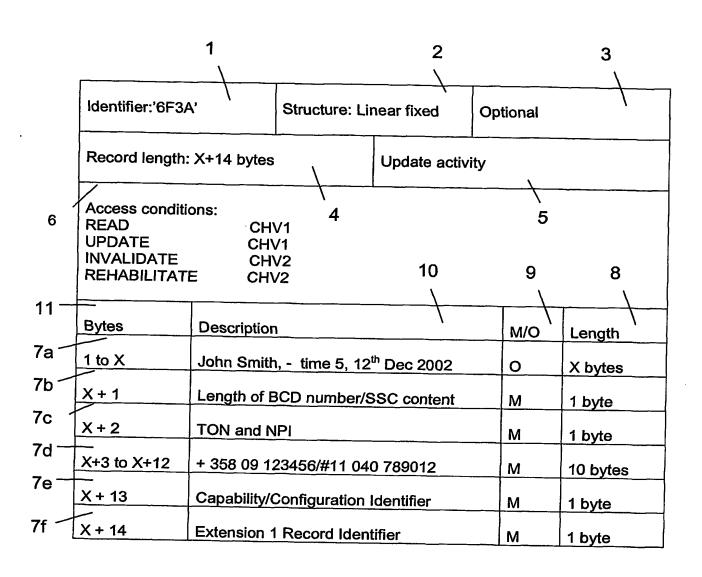


FIG. 2

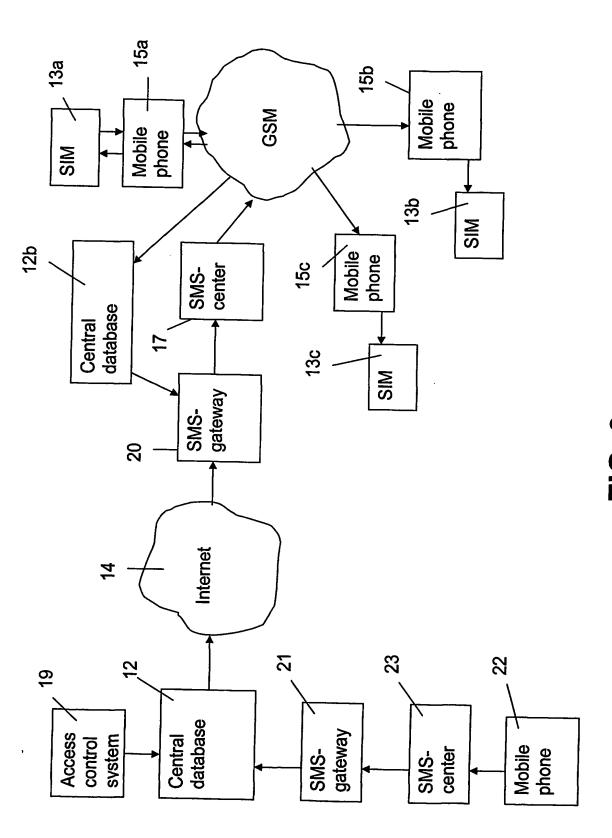


FIG. 3

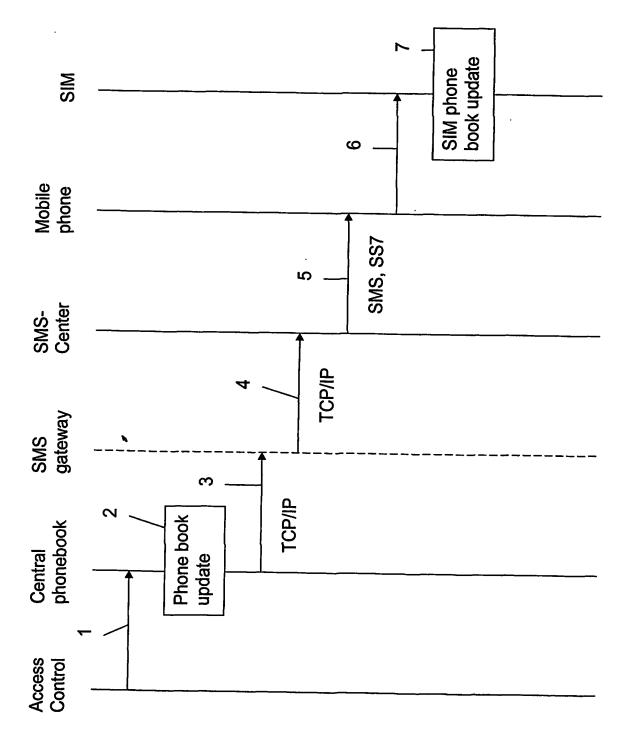


FIG. 4

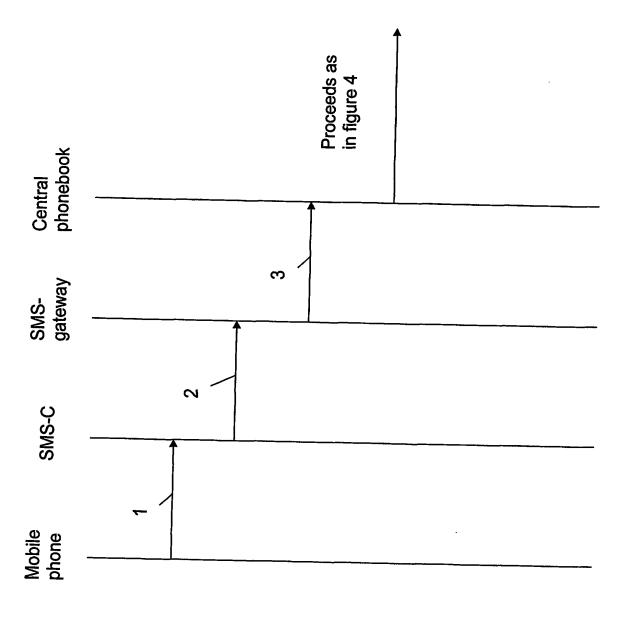


FIG. 5



International Application No PCT/SE 03/01856

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H04Q7/22 H04Q7/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

 $\frac{\text{Minimum documentation searched (classification system followed by classification symbols)}}{1\,PC~7~H04Q~G06F~H04M}$

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

x	10.00 47650 4 (0000000	Relevant to daim No.
	WO 02 17652 A (SYMBIAN LTD ;JENSON SCOTT (GB); RANDALL STEPHEN (GB)) 28 February 2002 (2002-02-28) page 1, line 11 - line 12	1,2,10, 11
	page 3, line 4 -page 6, line 14 claims 1,2,6-8,10-14,16-20	
Y		3-9
Y	WO 02 071219 A (SCHRIRE MICHAEL ANTON ;MATCHTIP LTD (GB); SELLERS PAUL (GB)) 12 September 2002 (2002-09-12) page 13, line 11 -page 15, line 21 abstract	3-9
4		1,2,10, 11
	-/	

	
Further documents are listed in the continuation of box C.	Y Patent family members are listed in annex.
Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filling date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filling date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
Date of the actual completion of the international search	Date of mailing of the international search report
9 March 2004	2 4. 03. 2004
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentiaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer ELISABET ÅSELIUS/MN



International Application No PCT/SE 03/01856

Category °	ation) DOCUMENTS CONSIDERED TO BE RELEVANT Citation of document, with indication, where appropriate, of the relevant passages	Polyment to state N
	TEL-F. TO SIGN OF THE PRODUCTION OF THE PRODUCTI	Relevant to claim No.
A	WO 02 073992 A (MARTLEW PAUL ; ÈRICSSON TELEFON AB L M (SE)) 19 September 2002 (2002-09-19) page 3, line 4 - line 28 abstract	1-11
·		
	· ,	·
PCT/ISADIO	(continuation of second sheet) (July 1992)	



information on patent family members

International Application No PCT/SE 03/01856

Patent document cited in search report	Publication date		Patent family member(s)	Publication date
WO 0217652 A	28-02-2002	EP WO GB GB US EP WO GB	1366435 A2 0217075 A2 0217652 A2 2371382 A ,B 2371178 A ,B 2004024846 A1 1314301 A1 0217602 A1 2370728 A ,B	03-12-2003 28-02-2002 28-02-2002 24-07-2002 17-07-2002 05-02-2004 28-05-2003 28-02-2002 03-07-2002
WO 02071219 A	12-09-2002	EP GB WO	1370943 A2 2373139 A ,B 02071219 A2	17-12-2003 11-09-2002 12-09-2002
WO 02073992 A	19-09-2002	WO	02073992 A1	19-09-2002

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS

MAGE CUT OFF AT TOP, BOTTOM OR SIDES

FADED TEXT OR DRAWING

BLURRED OR ILLEGIBLE TEXT OR DRAWING

SKEWED/SLANTED IMAGES

COLOR OR BLACK AND WHITE PHOTOGRAPHS

GRAY SCALE DOCUMENTS

LINES OR MARKS ON ORIGINAL DOCUMENT

REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

IMAGES ARE BEST AVAILABLE COPY.

OTHER:

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.